























## GEMMA 30 iR

-  IP40
-  Class III
-  Incasso a parete, soffitto, pavimento  
Wall, ceiling, floor recessed
-  Possibilità di scelta tra 7 differenti ottiche  
Available in 7 different optics
-  Collegare in serie 350mA o 500mA  
Connect in series at 350mA or 500mA
-  35 gr
-  Altamente riciclabile  
Highly recyclable



### GEMMA 30 iR

	1W 350mA	2W 500mA	Finiture Finish	Colore LED LED Colour
Lumen 3000K	100lm	150lm		
 10° Lens	734164._ _	734165._ _	<ul style="list-style-type: none"> <li> 1 Cromo Lucido Shiny Chrome</li> <li> 3 Grigio - Gray</li> <li> 4 Nero - Black</li> <li> U 2200K</li> <li> Y 2700K</li> <li> 6 3000K</li> <li> W 3000K CRI &gt; 90</li> <li> 9 4000K</li> </ul>	
 30° Lens	764164._ _	764165._ _		
 60° Lens	754164._ _	754165._ _		
 Vetro trasparente Transparent glass	724164._ _	724165._ _		
 Vetro satinato Frosted glass	714164._ _	714165._ _		
 40° Lens	744164._ _	744165._ _		
 130° Emission	704164._ _	704165._ _		

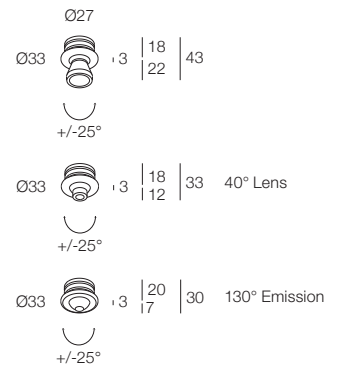


ALIMENTATORI CONSIGLIATI (non inclusi)  
SUGGESTED DRIVERS (not included)

350mA CC20-F-350-N  
500mA CC20-F-500-N

ACCESSORI  
ACCESSORIES



Cassaforma  
Housing  
A00102.30

 Ø 30 mm

EXAMPLE CODE COMPOSITION  
123456.

LED COLOUR  
FINISH